



INDEPENDENT HEAT CONDENSING BOILER

PRODUCT GUIDE



ASK YOUR
LOCAL BUSINESS
DEVELOPMENT
MANAGER
ABOUT THE
INDEPENDENT HEAT

IDEAL HEATING COMMERCIAL IS THE UK'S MARKET LEADER OF HIGH EFFICIENCY COMMERCIAL HEATING SOLUTIONS.

Independent Heat is a great choice for large domestic, light commercial and commercial installations.

Available exclusively to independent merchants, Independent Heat gives you the opportunity to broaden your product offering and provide more boiler solutions to your loyal customers.

Available in outputs of 40, 60, 80, 100, 120 and 150kW, Independent Heat is designed to ensure all installation requirements can be achieved.

There is also an LPG range from 40 - 80kW for off mains installations.

ASK YOUR
LOCAL BUSINESS
DEVELOPMENT
MANAGER
ABOUT THE
INDEPENDENT HEAT

SCAN ME



For full details visit:

[Idealcommercialheating.com/
products/independent-heat](https://idealcommercialheating.com/products/independent-heat)



INDEPENDENT
HEAT

ideal

HEATING

COMMERCIAL

- 4 - 8 Independent Heat
40 - 150kW
- 9 - 25 Independent Heat cascade
40 - 900kW
- 26 - 36 Independent Heat
flue options
- 37 - 39 Notes



British
built



Industry
trusted

Earn points for your registrations
with the Connect loyalty scheme.*

JOIN THE **CONNECT**
LOYALTY SCHEME TODAY:
INSTALLERCONNECT.COM

INDEPENDENT HEAT

40 - 150kW

Available in outputs of 40, 60, 80, 100, 120 and 150kW, Independent Heat is designed to ensure all installation requirements can be achieved. There is also an LPG range from 40kW to 80kW for off mains installations.



Wall hung



NOx class 6



Part L compliant



Flueing options



Cascade control



FEATURES AND BENEFITS

- 5 year warranty*
- Robust cast aluminium silicon alloy heat exchanger
- NOx <40mg/kWh (Class 6) for all natural gas models
- High 5:1 turn down
- Up to 99.6% full load efficiency
- Up to 110% part load efficiency
- Fully compatible with all Evomax 2 accessories
- Exactly the same compact footprint as Evomax, allowing for easy like for like replacement
- Earn points for your registrations with the Connect loyalty scheme.**
- Dynamic control menu set up
- Cascade controls option
- Easy servicing; 3 sides removable
- Built in, serviceable flue Non-Return Valve

CONNECT

Exclusively for independent merchants

A

Applies to Independent Heat 40 and 60kW models only.

DIMENSIONS AND CLEARANCES

BOILER	DIM A	DIM B
40, 60, 80	360	130
100, 120	520	226
150	610	233

All dimensions in mm

The following minimum clearances must be maintained for operation and servicing:



TOP: **DEPENDENT ON FLUE SIZE**

SIDES: **25mm**

FRONT: **450mm**

BOTTOM: **300mm**

CLEARANCE BETWEEN MULTIPLE BOILER INSTALLATIONS: **25mm**

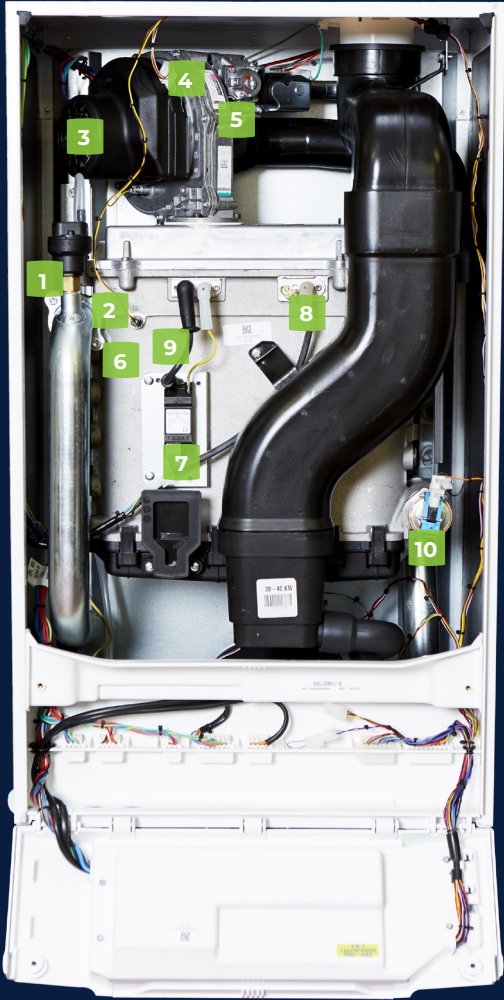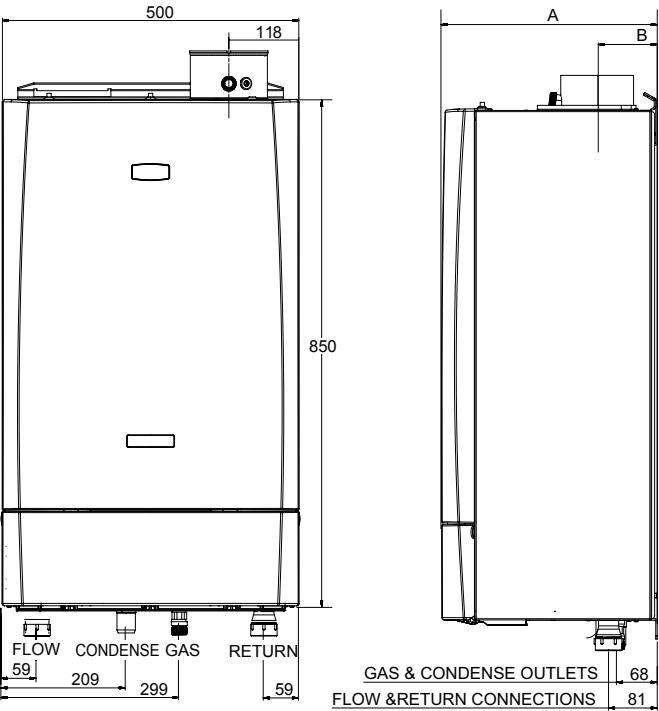

BOILER ASSEMBLY
INTERNAL VIEW
(40kW MODEL SHOWN)

- KEY**
- 1. Auto air vent
 - 2. Burner fixings
 - 3. Fan
 - 4. Gas valve
 - 5. Venturi
 - 6. Flow thermistor
 - 7. Ignitor unit
 - 8. Electrode detection
 - 9. Ignition electrode
 - 10. Water pressure sensor

PERFORMANCE DATA

INDEPENDENT HEAT 40 - 150kW (Natural Gas)

MODEL			40	60	80	100	120	150
Boiler output (non-condensing) Mean 70°C	Max	kW	40	60	80	100	120	150
	Min	kW	8	12	16	20	24	30
Boiler output (condensing) mean 40°C	Max	kW	42.0	63.5	84.4	103.9	124.7	158
	Min	kW	8.5	12.7	17.2	21.6	26.0	32.5
Boiler input max rate	Net	kW	40.5	60.8	82.0	102.4	122.9	153.7
	Gross	kW	44.9	67.4	90.9	113.6	136.4	170.5
Boiler input min rate	Net	kW	8.1	12.2	16.4	20.5	24.6	30.7
	Gross	kW	9.0	13.5	18.2	22.7	27.3	34.1
Gas rate	Max rate	m³/hr	4.3	6.4	8.7	10.8	13.0	16.2
Flue gas flow rate	Max rate	m³/hr	54.05	80.65	110.10	140.50	173.33	210.70
CO ₂ (±0.5%)	Max rate	%	10.20	9.40	9.30	9.40	9.62	9.44
	Min rate	%	8.60	8.60	8.70	8.60	8.98	8.51
NOx with O ₂ = 0% (gross)	Weighted	mg/kWh	33.2	35.2	34.9	34.8	33.9	35.7
Efficiency	Seasonal	%	96.2	96.4	97.2	96.7	96.6	96.7
	*SEDBUK 2009	%	89.3	89.4	n/a	n/a	n/a	n/a
Operating temperature sealed (open)	Max	°C	85 (82)					

INDEPENDENT HEAT 40 - 80kW (LPG)

MODEL			40P	60P	80P
Boiler output (non-condensing) mean 70°	Max	kW	40	60	80
	Min	kW	8	12	16
Boiler output (condensing) mean 40°C	Max	kW	41.2	62.1	82.6
	Min	kW	8.3	12.4	16.8
Boiler input max rate	Net	kW	40.5	60.7	81.9
	Gross	kW	44	66	88.9
Boiler input min rate	Net	kW	8.1	12.0	16.2
	Gross	kW	8.8	13.1	17.5
Gas rate	Max rate	m³/hr	1.69	2.53	3.41
Flue gas flow rate	Max rate	m³/hr	61.68	88.66	121.57
CO ₂ (±0.5%)	Max rate	%	11.2	11.4	11.4
	Min rate	%	9.7	10.2	10.8
NOx with O ₂ = 0% (gross)	Weighted	mg/kWh	64.4	67.7	63.2
Efficiency	Seasonal	%	96.7	96.9	97.7
	*SEDBUK 2009	%	90.3	90.5	n/a
Operating temperature sealed (open)	Max	°C	85 (82)		

GENERAL DATA

INDEPENDENT HEAT 40 - 150kW (Natural gas and LPG)

MODEL		40/40P	60/60P	80/80P	100	120	150
Gas supply		2H - G20 - 20mbar / 3P - G31 - 37mbar					
Gas supply connection		G ¾					
Flow connection		G1 ¼					
Return connection		G1 ¼					
Max pressure (sealed system)	Bar (psi)	6					
Maximum static head	m	61					
Electricity supply		230V - 50Hz					
Fuse rating	A	4.0					
Power consumption	W	81	82	149	187	243	240
IP rating		IPX4D					
Nominal flue size (concentric)	mm	80/125*			100/150		
Condensate drain	mm	25					
Water content	l	3.0	5.0		7.0		9.2
Dry weight	kg	47.5	57.5		73		81
Weighted power level	dBA	57.7	59	59.9	62	62	59

*Optional kit available on 60kW and 80kW models for 100/150mm flue

INCLUDED AS STANDARD

BOILER	INDEPENDENT HEAT
Remote indication (run and alarm)	✓
Hours run	✓
BMS (0-10v) operation	✓
Pump overrun	✓
Large backlit LCD controls, including 5 line plain text display	✓
Dynamic control menu set up	✓

OPTIONAL EVOMAX 2 KITS FOR INDEPENDENT HEAT

BOILER	INDEPENDENT HEAT
Multi boiler frame and header kits (see pages 9-16)	✓
Varican module master kit	✓
Varican module slave kit	✓
Extension module kit	✓
OPENTHERM room control kit	✓
Room sensor kit	✓
Tank sensor kit	✓
Outside sensor kit	✓
Header flow tank immersion sensor kit	✓
Header flow tank strap on sensor kit	✓
Safety interlock kit	✓
0-10V pump control kit	✓
Condensate pump	✓

* The value is used in the UK Government's Standard Assessment Procedure (SAP) for energy ratings of dwellings. The test data from which it has been calculated have been certified by a notified body.

SYSTEM TEMPERATURE DIFFERENTIALS

Flow rates for common systems using either 11°C, 15°C, 20°C, 25°C or 30°C temperature differentials are given in the table below.

BOILER	FLOW RATE (L/MIN)				HYDRAULIC RESISTANCE (MBAR)				
	11°C	15°C	25°C	30°C	11°C	15°C	20°C	25°C	30°C
Independent Heat 40 / 40P	52.1	38.2	23.9	19.1	875	405	225	163	100
Independent Heat 60 / 60P	78.2	57.3	35.9	28.7	435	180	83	57	30
Independent Heat 80 / 80P	104.2	76.4	47.8	38.2	750	420	180	125	70
Independent Heat 100	N/A	95.6	59.8	47.8	N/A	315	134	97	60
Independent Heat 120	N/A	N/A	71.7	57.3	N/A	N/A	218	149	80
Independent Heat 150	N/A	N/A	89.6	71.7	N/A	N/A	230	158	85

- 40, 60 and 80kW boilers must operate with temperature differentials from 11°C to 30°C.
- 100kW boilers must operate with temperature differentials from 15°C to 30°C.
- 120 and 150kW boilers must operate with temperature differentials from 20°C to 30°C.

CONTROL KITS

VARICAN MODULE MASTER and SLAVE KITS

Enables cascade control from Independent Heat boiler controls.

EXTENSION MODULE KIT

Capable of managing 2 mixing circuits. Multiple modules can be used.

OPENTHERM ROOM CONTROL KIT

Timed control of central heating via OPENTHERM.

ROOM SENSOR KIT

Used with Extension Module Kit for CH control

TANK SENSOR KIT

Provides DHW temperature control. Also for use with Extension Module Kit.

OUTSIDE SENSOR KIT

Provides weather compensation directly or with Extension Module Kit.

HEADER FLOW TANK IMMERSION SENSOR KIT

Ensures boiler provides correct temperature to water in header via immersed sensor

HEADER FLOW TANK STRAP ON SENSOR KIT

Ensures boiler provides correct temperature to water in header via external sensor

SAFETY INTERLOCK KIT

Provides boiler shut down via an external signal.

FLUE SYSTEMS

A comprehensive range of flue kits are available from Ideal Heating including horizontal and vertical concentric and open flue options.

For horizontal flues: this is the distance from the flue outlet centre line on the boiler to the outside wall.

For vertical flue: this is the distance from the top of the boiler case to the aperture in the weather collar. If elbows are to be used, then the equivalent length of that fitting must be subtracted from the maximum flue extensions allowed for that flue option.

Note: horizontal terminal resistance includes 1 x 90° elbow.

When installing Independent Heat boilers with concentric flue (horizontally or vertically) the Ideal Commercial flue system must be used.

The resistance of flue components, together with the maximum flue resistance each boiler can work against, may be used to calculate the total flue resistance of the system, and to determine if they are acceptable to run on the boiler. Multiple boilers may be installed with a common flue header.

The flue system should be designed and supplied by a specialist flue company. BS 6644 and IGEN UP10 provide guidance on design and the drainage of condensate from flue stack and headers. Condensate from a flue stack and header must be collected and drained before entering the boiler.

For ventilation requirements, please refer to the installation manual.

INDEPENDENT HEAT CASCADE


Frame and header kits

For installations requiring more output delivered in a flexible way, up to 6 Independent Heat boilers can be installed in a cascade using Evomax 2 accessories.

An output of up to 900kW is possible with this modular option which is available in both inline (standard and low height) and back to back arrangements.



Cascade control

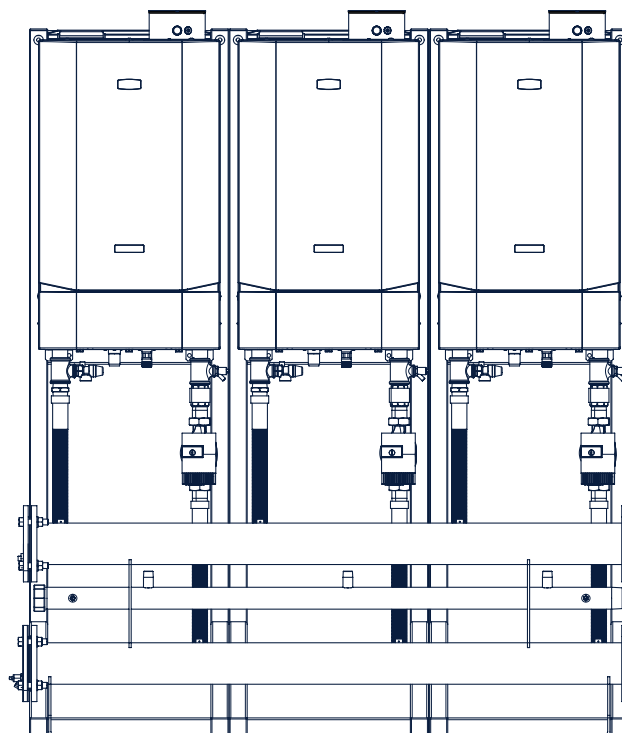

CHOOSING WHAT YOU NEED IS STRAIGHTFORWARD:

Choose frames: select standard or low height frames, or mount on a wall

Choose a header: select an inline or back to back configuration for the total number of boilers in the cascade

Choose hydraulic separation: select plate heat exchanger, magnetic low loss header or low loss header

Choose pumps: select the relevant pump for your cascade

Choose insulation: select the insulation for a header, separation and pumps

A few things to bear in mind:

- A standard height inline or back to back cascade can be for up to 6 boilers
- A low height inline cascade can be for up to 4 boilers
- 1 standard height frame required for each boiler in the cascade
- 1 pump required for each boiler in the cascade

The wide range of options available are detailed on the pages overleaf. Alternatively, use our online Evomax 2 Cascade Configurator tool to compile a complete list of accessories for your cascade:

idealcommercialheating.com/evomax2-cascade-configurator

SCAN ME



CASCADE
CONFIGURATOR

Scan the QR code to use the online tool.

CASCADE ACCESSORIES FOR INDEPENDENT HEAT

CHOOSE A FRAME KIT

Standard height

Up to 6 boilers
206970
1 frame required per boiler i.e. a 6 boiler cascade requires 6 frames

Low height inline

Up to 4 boilers
Included with Low Height Header Kit


Boilers not included with frame or header kits; please remember to add them to your order.

EVOMAX 2 PHEX PACKAGE

234562

A complete package to allow installation of single boilers with hydraulic separation from the secondary system using a brazed plate stainless steel Plate heat exchanger. The boiler side of the package includes expansion vessel, pressure gauge, pressure relief valve, filling point and drain connection. Suitable for all Evomax2 boiler models with standard operating temperatures of 85/65°C boiler side and 75/55°C secondary side. Please contact your local sales representative to discuss other operating temperature profiles.

A complete package requires an Evomax2 boiler and boiler pump to be added.

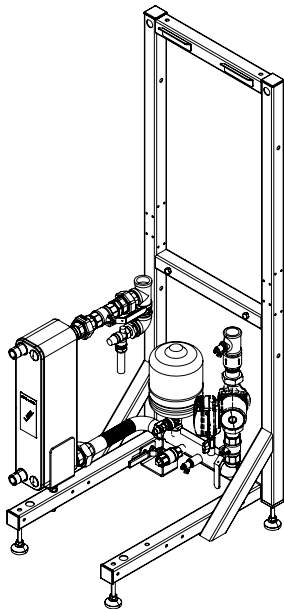

CHOOSE A HEADER KIT

Standard height frame, inline boilers

2 boilers, 30 - 100kW (DN80) for PHEX & LLH
219542

2 boilers, 120 and 150kW (DN100) for PHEX & LLH
219547

3 boilers, 30 - 100kW (DN80) for w & LLH
219543

3 boilers, 120 and 150kW (DN100) for PHEX & LLH
219548

4 boilers, 30 - 150kW (DN100) for PHEX & LLH
219549

5 boilers, 30 - 100kW (DN100) for PHEX & LLH
5 boilers, 120 and 150kW (DN100), PHEX
219545

5 boilers, 120 and 150kW (DN150) for LLH ONLY
219550

6 boilers, 30 - 150kW (DN100) for PHEX
6 boilers, 30 - 100kW (DN100) for LLH
219546

6 boilers, 120 and 150kW (DN150) for LLH ONLY
219551

Standard height frame, back to back boilers

2 boilers, 30 - 150kW (DN80) for PHEX & LLH
219555

3 boilers, 30 - 150kW (DN80) for PHEX & LLH
219556

4 boilers, 30 - 150kW (DN100) for PHEX & LLH
219557

5 boilers, 30 - 150kW (DN100) for PHEX & LLH
219558

6 boilers, 30 - 150kW (DN100) for PHEX ONLY
222397

6 boilers, 30 - 150kW (DN150) for LLH ONLY
219559

Low height frame, inline boiler

1 boiler, 30 - 150kW for (DN50) for PHEX & LLH
221127

2 boilers, 30 - 150kW (DN65) for PHEX & LLH
221128

3 boilers, 30 - 150kW (DN80) for PHEX & LLH
221129

4 boilers, 30 - 150kW (DN100) for PHEX & LLH
219561

Create your cascade frame and header kit: Independent Heat are fully compatible with all Evomax 2 accessories.

Scan the QR code below to use the online tool.



CASCADE
CONFIGURATOR

CHOOSE HYDRAULIC SEPARATION
Low loss / mixing header
DN50 - 209394
DN65 - 209395
DN80 - 219552
DN100 - 219553
DN150 - 219554
Magnetic low loss / mixing header (MLLH)
DN50 - 222191
DN65 - 222192
DN80 - 222193
DN100 - 222194
Plate heat exchanger
Up to 60kW nominal output (DN50) 222219 Insulation kit - 234443
Up to 60kW nominal output (DN65) 222993 Insulation kit - 234443
Up to 60kW nominal output (DN80) 222220 Insulation kit - 234444
Up to 150kW nominal output (DN50) 222221 Insulation kit - 234445
Up to 150kW nominal output (DN65) 222994 Insulation kit - 234445
Up to 150kW nominal output (DN80) 222222 Insulation kit - 234446
Up to 300kW nominal output (DN65) 222223 Insulation kit - 234447
Up to 300kW nominal output (DN80) 222225 Insulation kit - 234447
Up to 300kW nominal output (DN100) 222995 Insulation kit - 234448
Up to 450kW nominal output (DN80) 222226 Insulation kit - 234449

Plate heat exchanger
Up to 450kW nominal output (DN100) 222996 Insulation kit - 234449
Up to 600kW nominal output (DN100) 222227 Insulation kit - 234450
Up to 750kW nominal output (DN100) 242216 Insulation kit - 246284
Up to 900kW nominal output (DN100) 242217 Insulation kit - 246285

CHOOSE PUMPS
Low loss / mixing header chosen
Grundfos UPM10L (M) LLH pump kit 222659
Plate heat exchanger chosen*
Grundfos UPM20M PHEX pump kit 252584
No separation chosen
Grundfos UPM20M PHEX pump kit 252584

*Recommended for use on 150kW boiler models regardless of separation type.

If using a low loss header or plate heat exchanger not from Ideal Heating please contact your local Ideal Heating Commercial sales representative.


CHOOSE INSULATION
For standard height header kits
DN80/100 starter kit 222960
DN80/100 continuation kit 222961
DN80/100 joined header kit 222962
For low height header kits
DN50 starter kit 223032
DN65 starter kit 223035
DN65 continuation kit 223036
DN80/100 starter kit 223038

For low height header kits
DN80/100 continuation kit 223039
DN80/100 joined header kit 223040
For low loss and magnetic low loss header
DN50 (M)LLH insulation kit 222963
DN65 (M)LLH insulation kit 222964
DN80/100 (M)LLH insulation kit 222965
For Grundfos UPM10L (M)LLH pump kit
(M)LLH pump insulation kit 222894

ADDITIONAL HYDRAULIC ACCESSORIES
Flexible gas pipe standard height for fitting Evomax 2 on Evomax rig 219563
Flexible gas pipe low height for fitting Evomax 2 on Evomax rig 219564
Flexible gas pipe back to back for fitting Evomax 2 on Evomax rig 219565
Pipe connections to 1.5" Pump 219536
Butterfly valves for MLLH (2 pack)DN50 222123
Butterfly valves for MLLH (2 pack)DN65 222124
Butterfly valves for MLLH (2 pack)DN80 222125
Butterfly valves for MLLH (2 pack)DN100 222126
Pump union kit for using Grundfos pumps without Ideal frame and header kits 225544


STANDARD HEIGHT INLINE CASCADES

2 X INDEPENDENT HEAT

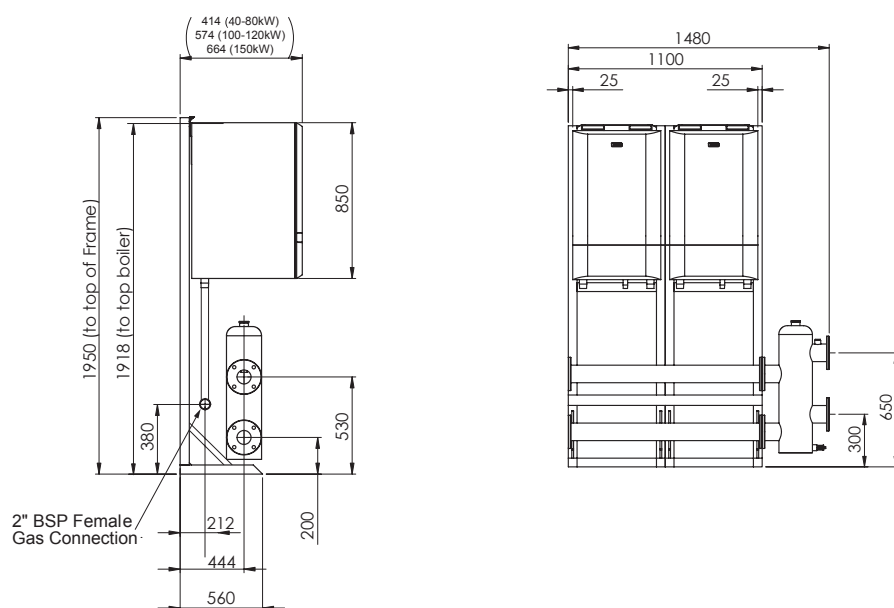

UIN	DN FLANGE SIZE	SUITABLE FOR
219542	DN80	2 x Independent Heat boilers, 40 – 100kW with PHEX or (M)LLH separation
219547	DN100	2 x Independent Heat boilers, 120 and 150kW with PHEX or (M)LLH separation


3 X INDEPENDENT HEAT

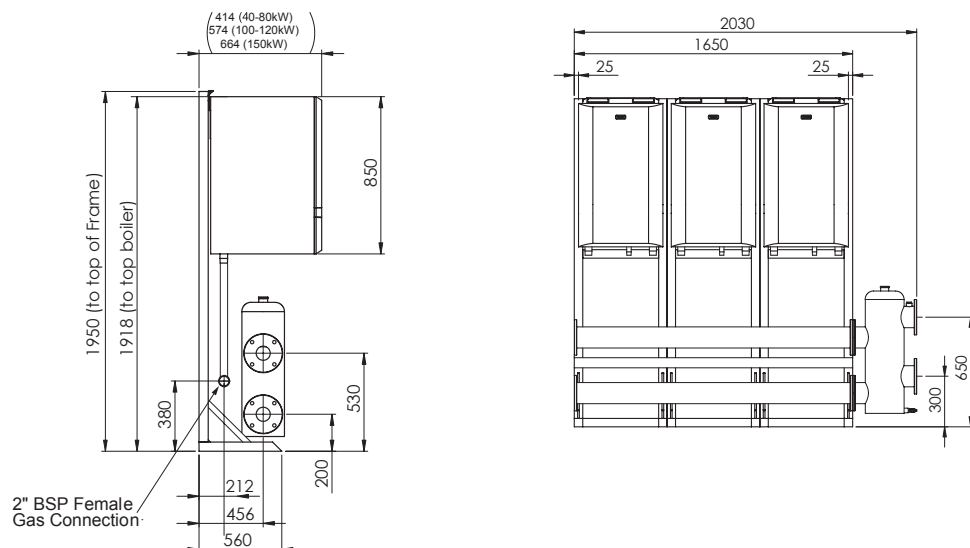

UIN	DN FLANGE SIZE	SUITABLE FOR
219543	DN80	3 x Independent Heat boilers, 40 – 100kW with PHEX or (M)LLH separation
219547	DN100	3 x Independent Heat boilers, 120 and 150kW with PHEX or (M)LLH separation


STANDARD HEIGHT INLINE CASCADES

4 X INDEPENDENT HEAT

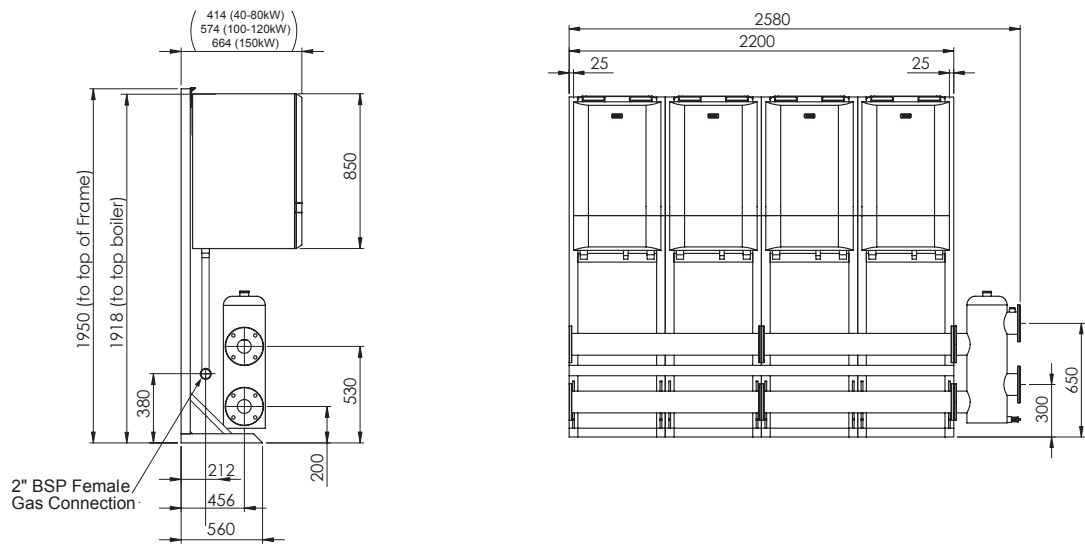

UIN	DN FLANGE SIZE	SUITABLE FOR
219549	DN100	4 x Independent Heat boilers, 40 – 150kW with PHEX or (M)LLH separation


5 X INDEPENDENT HEAT

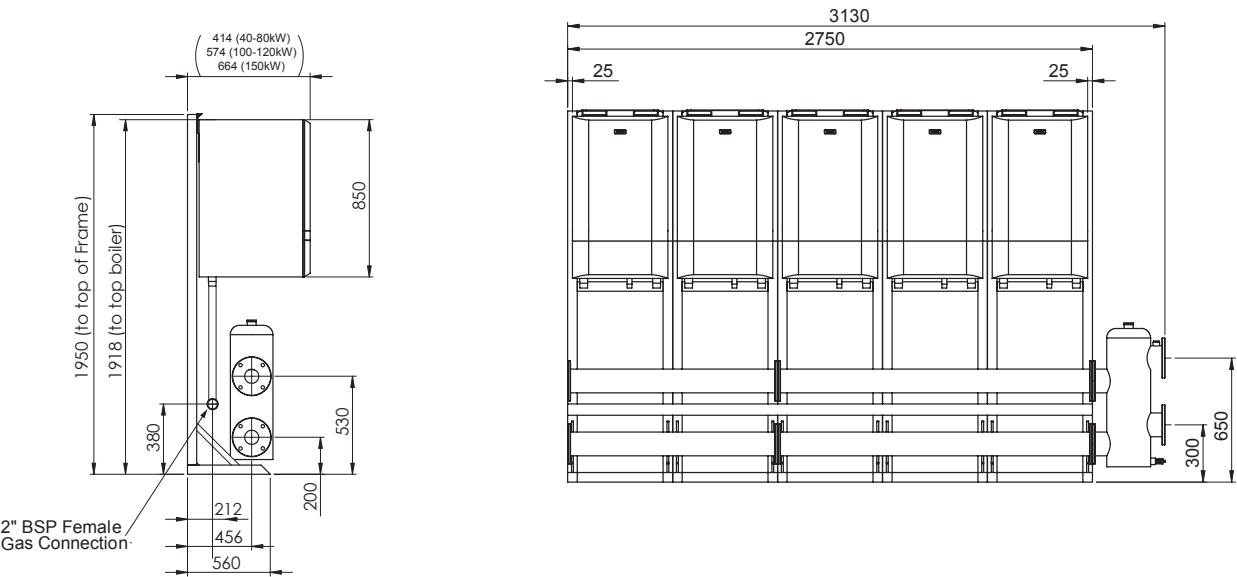

UIN	DN FLANGE SIZE	SUITABLE FOR
219545	DN100	5 x Independent Heat boilers, 40 – 150kW with PHEX separation 5 x Independent Heat boilers, 40 – 100kW with (M)LLH separation
219547	DN150	5 x Independent Heat boilers, 120 and 150kW with LLH separation


STANDARD HEIGHT INLINE CASCADES

6 X INDEPENDENT HEAT

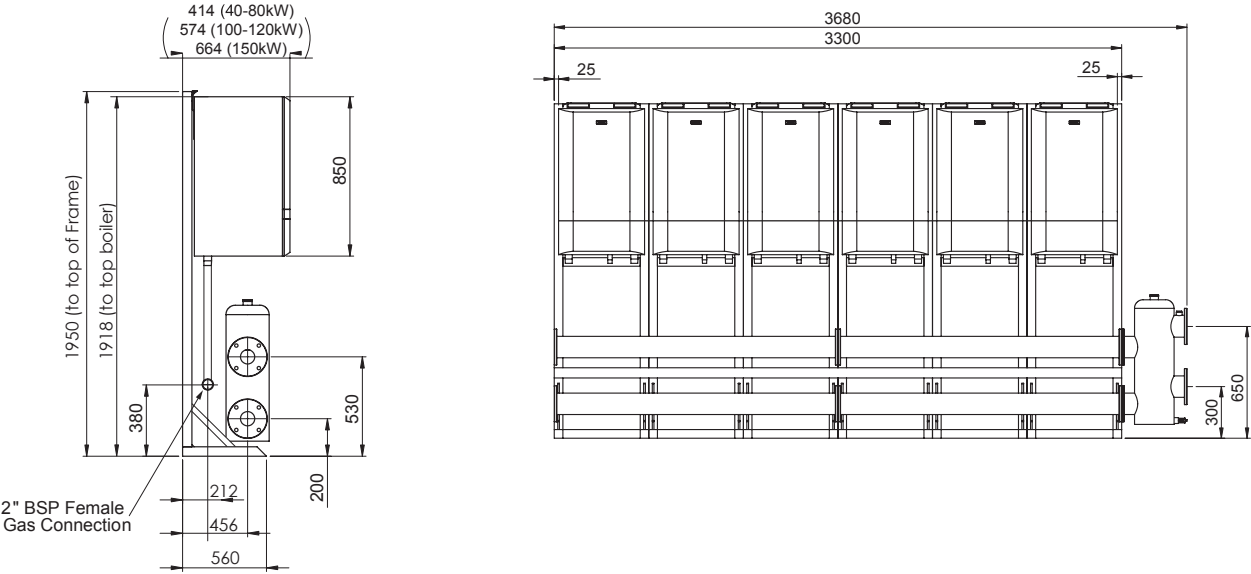


UIN	DN FLANGE SIZE	SUITABLE FOR
219546	DN100	6 x Independent Heat boilers, 40 – 150kW with PHEX separation 6 x Independent Heat boilers, 40 – 100kW with (M)LLH separation
219551	DN150	6 x Independent Heat boilers, 120 and 150kW with LLH separation

STANDARD HEIGHT

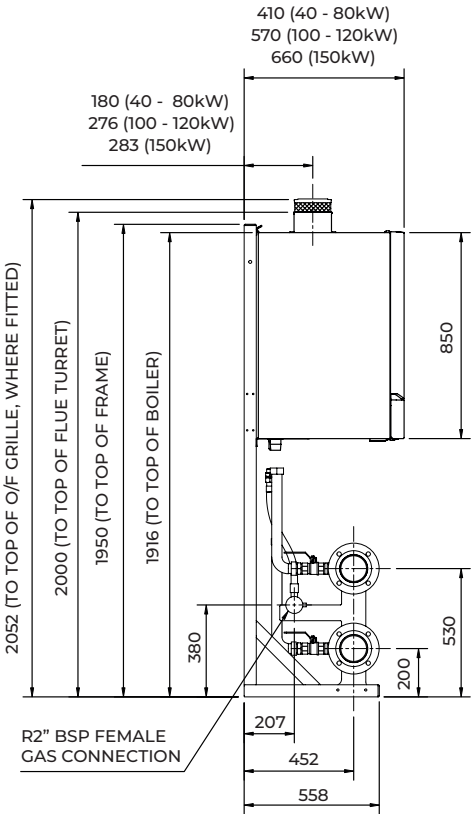


LOW HEIGHT

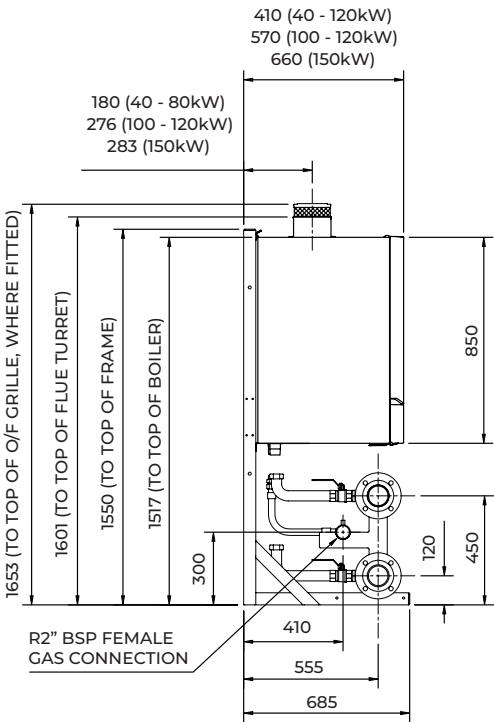


LOW HEIGHT INLINE CASCADES

1 X INDEPENDENT HEAT

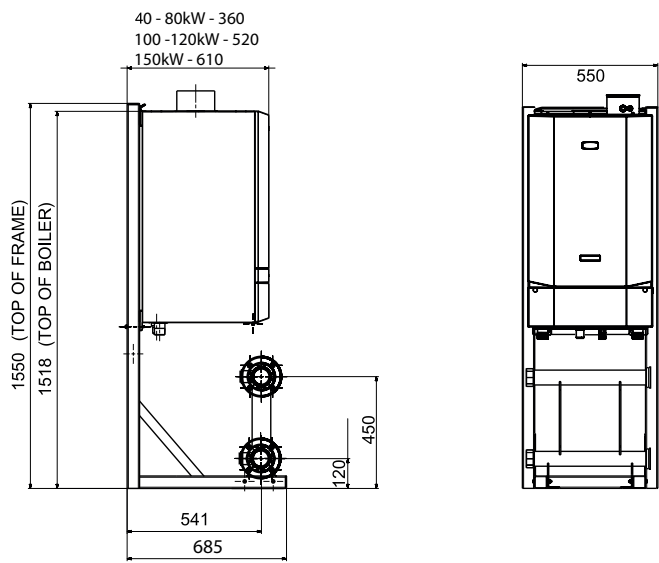

UIN	DN FLANGE SIZE	SUITABLE FOR
221127	DN50	1 x Independent Heat boiler, 40 – 150kW with PHEX or (M)LLH separation


2 X INDEPENDENT HEAT

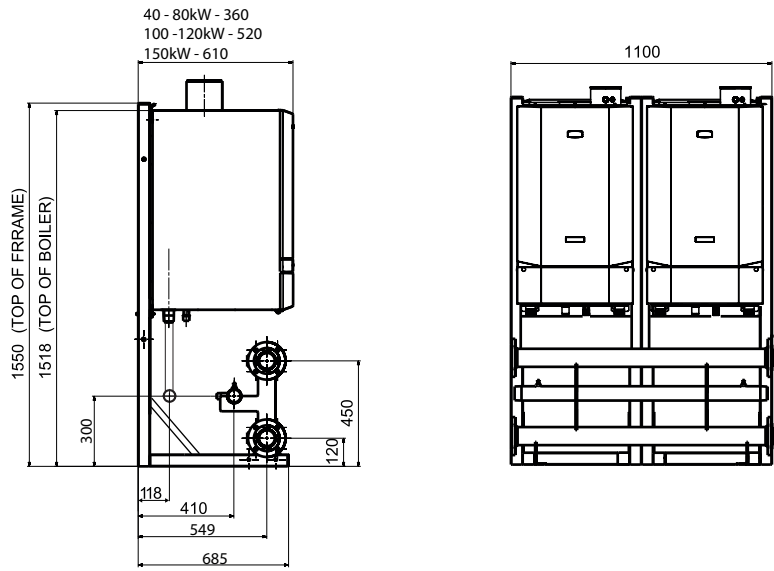

UIN	DN FLANGE SIZE	SUITABLE FOR
221128	DN65	2 x Independent Heat boilers 40 – 150kW with PHEX or (M)LLH separation


LOW HEIGHT INLINE CASCADES

3 X INDEPENDENT HEAT

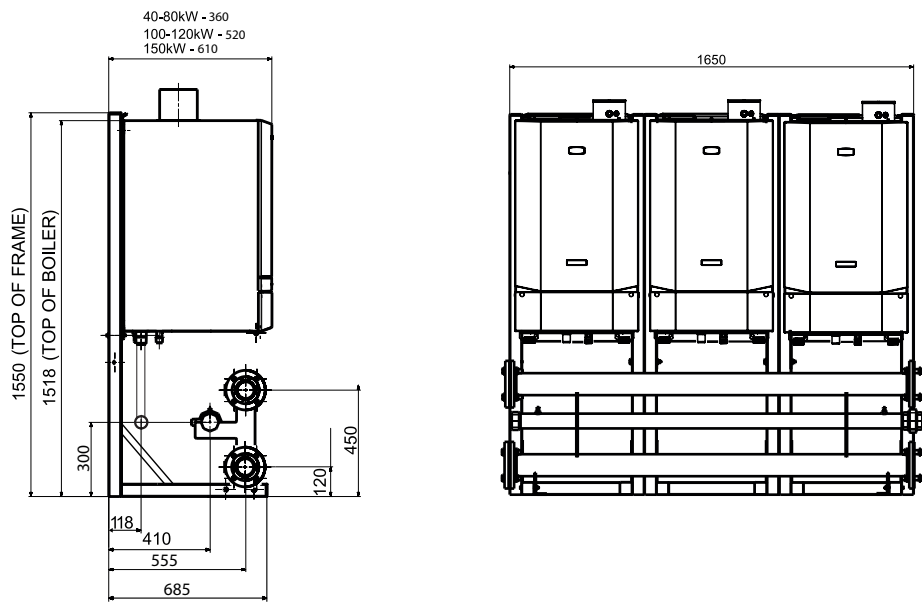

UIN	DN FLANGE SIZE	SUITABLE FOR
221129	DN80	3 x Independent Heat boilers, 40 – 150kW with PHEX or (M)LLH separation

4 X INDEPENDENT HEAT

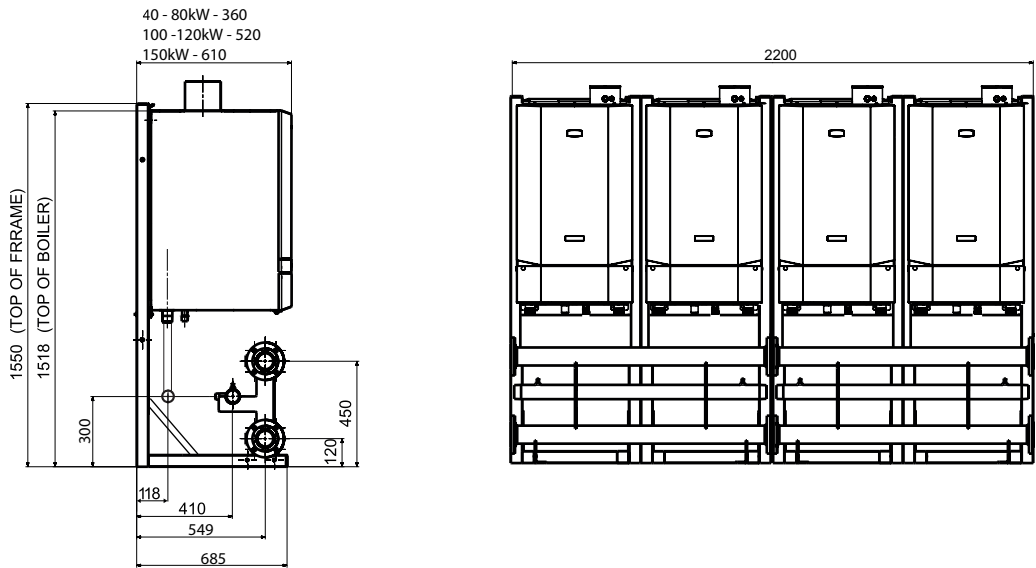

UIN	DN FLANGE SIZE	SUITABLE FOR
219561	DN100	4 x Independent Heat boilers, 40 – 150kW with PHEX or (M)LLH separation

Note: all flanges on boiler headers are PN6

HYDRAULIC SEPARATION

Ideal Heating offer various solutions to hydraulic separation

Plate heat exchanger




Covering outputs of 60, 150, 300, 450, 600, 750 and 900kW. Brazed plate heat exchangers ensure optimum heat transfer efficiency and low resistance within a compact footprint. To be used with Ideal Heating frame and header kits.

FEATURES AND BENEFITS


- Compact design
- No gaskets
- Low maintenance and self-cleaning
- All units are pressure tested
- To be used with Ideal Heating frame and header kits
- Ensures optimal heat transfer efficiency and pressure resistance
- Separates system water from the boiler
- Ensures the highest performance for longest possible service life

UP TO 60KW NOMINAL OUTPUT PLATE HEAT EXCHANGER


UIN	DN FLANGE SIZE
222219	DN50
222993	DN65
222220	DN80

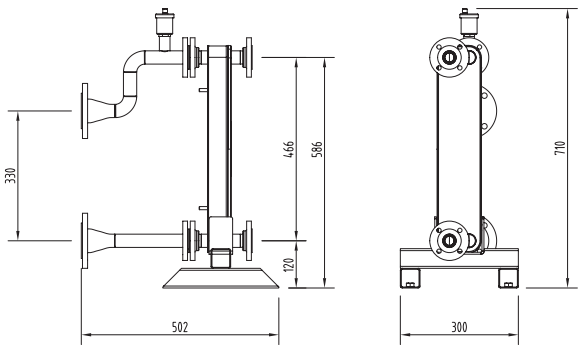

222219 DN50

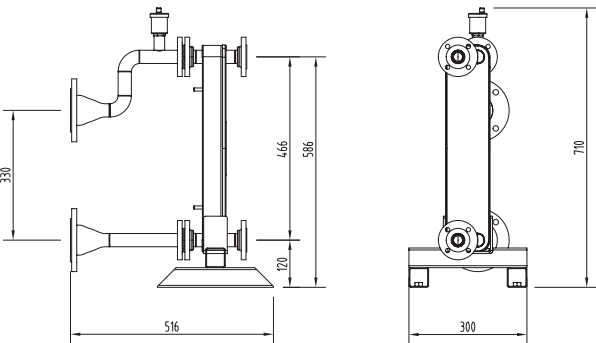

222993 DN65

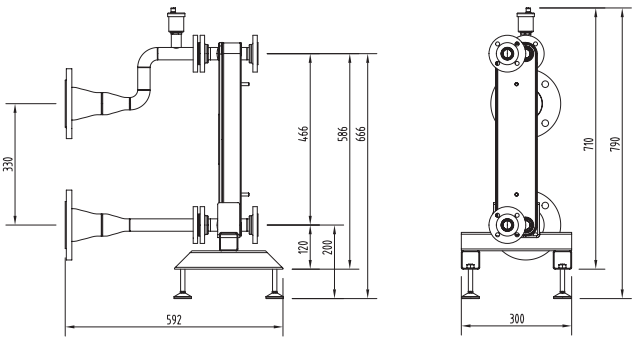


222220 DN80


Note: refer to PHEX spec sheets for details of secondary flange sizes and PN ratings.

UP TO 150KW TOTAL OUTPUT
PLATE HEAT EXCHANGER


UIN	DN FLANGE SIZE
222221	DN50
222994	DN65
222222	DN80

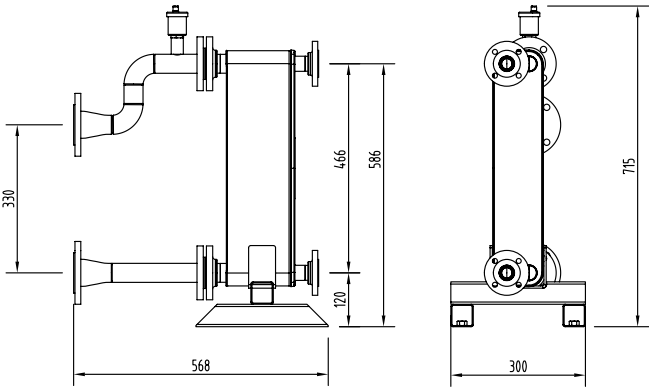

222221 DN50

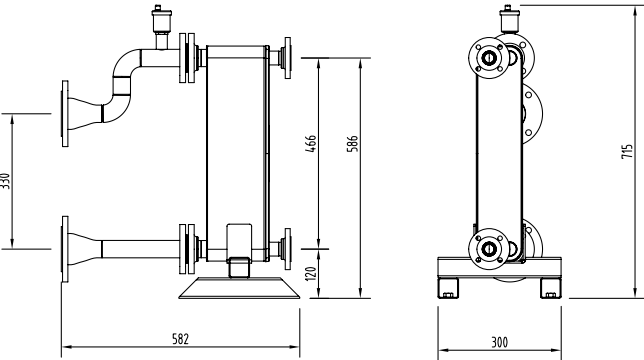


222222 DN80

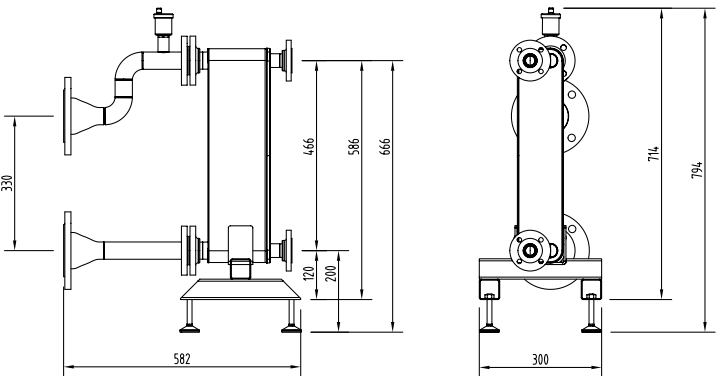


222994 DN65

UP TO 300KW TOTAL OUTPUT
PLATE HEAT EXCHANGER


UIN	DN FLANGE SIZE
222223	DN65
222225	DN80
222995	DN100

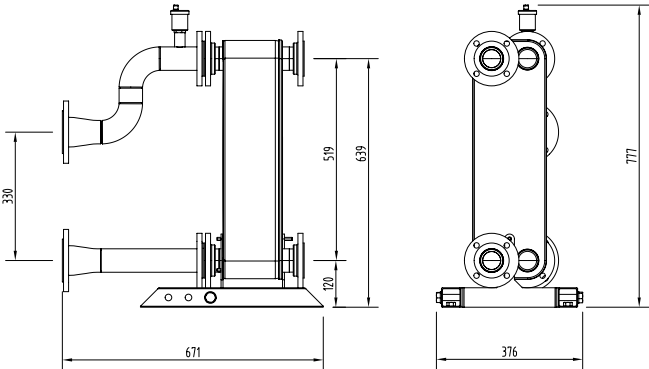

222223 DN65

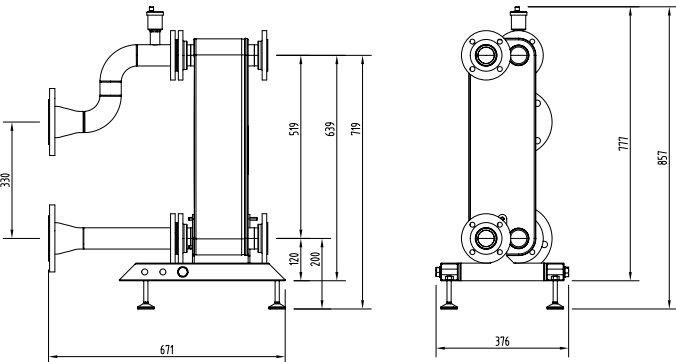


222225 DN80

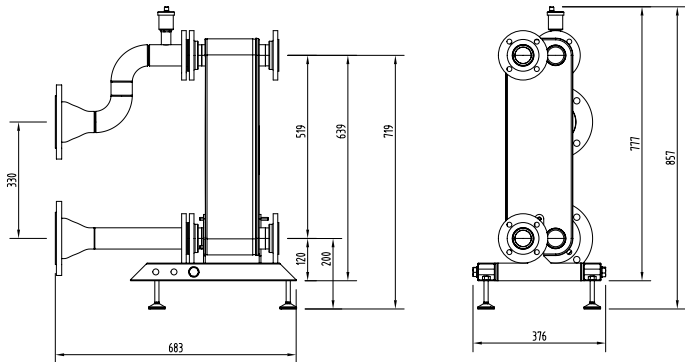

222995 DN100


UP TO 450KW TOTAL OUTPUT
PLATE HEAT EXCHANGER

UIN	DN FLANGE SIZE
222226	DN80
222996	DN100

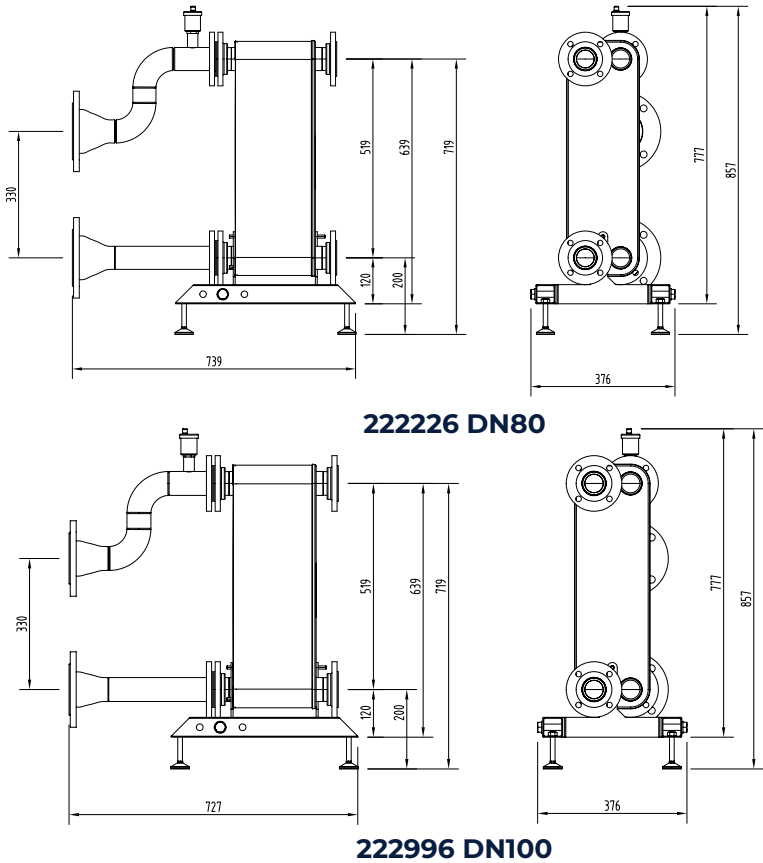

UP TO 600KW TOTAL OUTPUT
PLATE HEAT EXCHANGER


UIN	DN FLANGE SIZE
222227	DN100

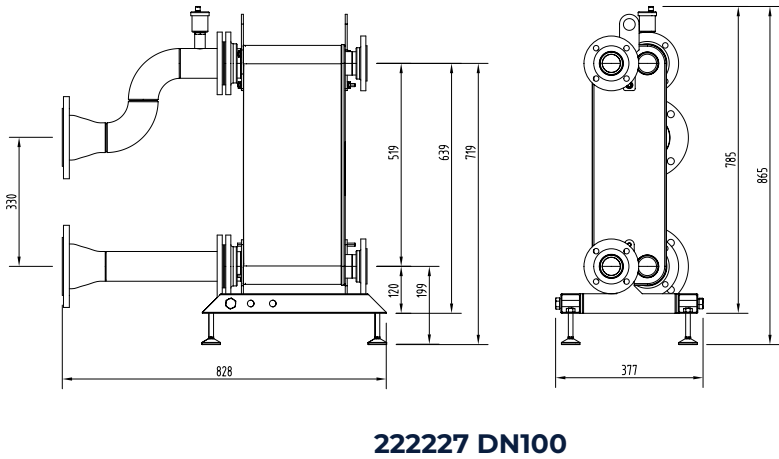

Note: refer to PHEX spec sheets for details of secondary flange sizes and PN ratings.

UP TO 750KW NOMINAL OUTPUT
PLATE HEAT EXCHANGER


UIN	DN FLANGE SIZE
242216	DN100

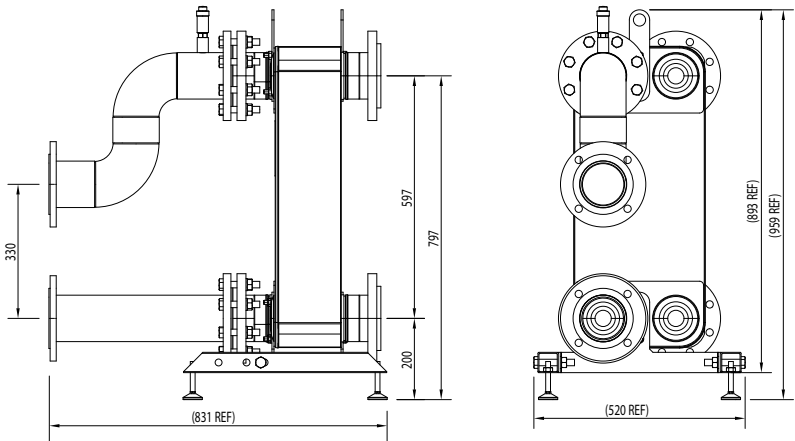

242216 DN100

UP TO 900KW NOMINAL OUTPUT
PLATE HEAT EXCHANGER

UIN	DN FLANGE SIZE
242217	DN100

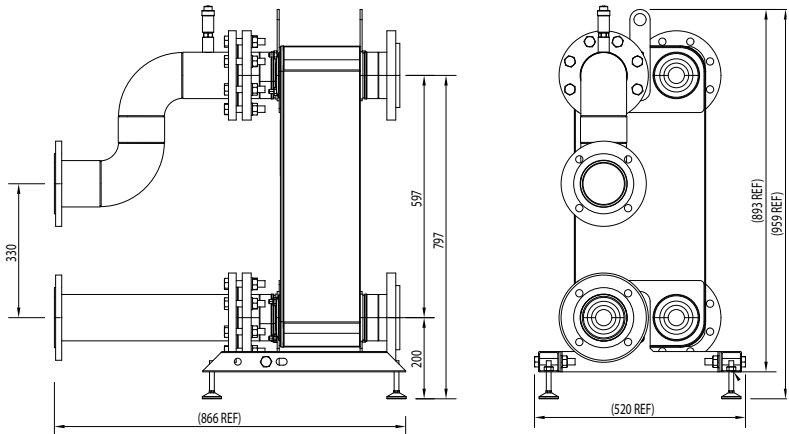

242217 DN100

Note: refer to PHEX spec sheets for details of secondary flange sizes and PN ratings.

LOW LOSS HEADER AND MAGNETIC LOW LOSS HEADER

Providing an alternative approach to hydraulic separation, low loss headers (LLH) are available in various sizes to suit the accompanying header kits. There is also the option of a magnetic low loss header (MLLH), combining the benefits of a low loss header and a magnetic filter.

LOW LOSS HEADER

UIN	DN FLANGE SIZE
209394	DN50
209395	DN65
219552	DN80
219553	DN100
219554	DN150

MAGNETIC LOW LOSS HEADER

UIN	DN FLANGE SIZE
222191	DN50
222192	DN65
222193	DN80
222194	DN100

Note: all low loss and magnetic low loss headers use PN6 flanges

PUMPS

To ensure your Evomax 2 Cascade works correctly, it is vital to fit the correct pumps. One pump is required per boiler in the Cascade.

SEPARATION CHOSEN	UIN	PUMP TYPE
(M)LLH	222659	Grundfos UPM10L (M) LLH pump kit
PHEX or none	252584	Grundfos UPM20M PHEX pump kit




UPM10 / UPM20M

Note: pumps with screwed connections are G1.1/2" x 180mm.


INSULATION

Header kits and low loss headers can be insulated using our robust expanded polypropylene modular insulation range. Insulation is also available for 222659 Grundfos UPM10L (M) LLH pump kit. The number of boilers in your cascade will determine the type and number of kits required.

DN100 STANDARD HEIGHT IN-LINE HEADER

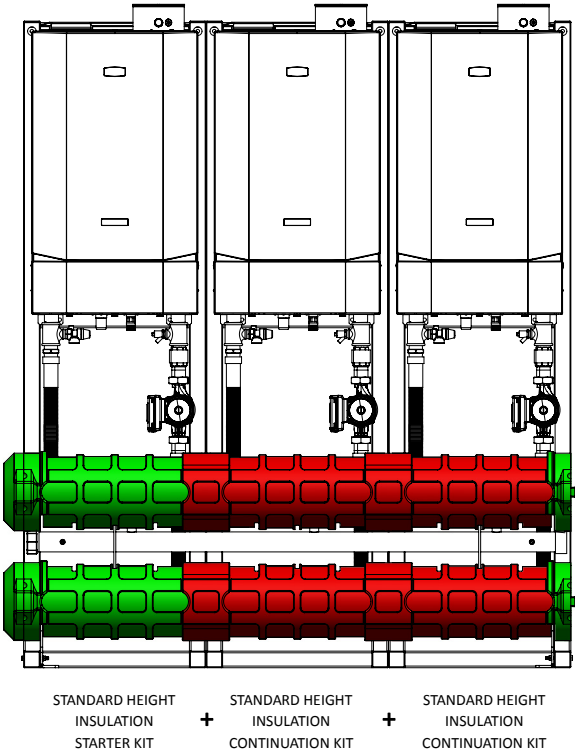

DN80 LOW HEIGHT 4 IN-LINE HEADER

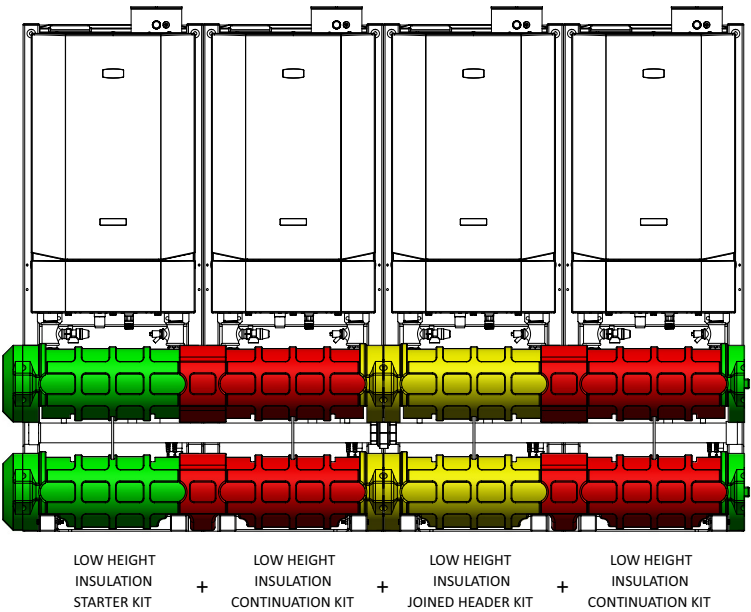

INSULATION FOR STANDARD HEIGHT INLINE HEADER KITS

UIN	DESCRIPTION	2 BOILER CASCADE	3 BOILER CASCADE	4 BOILER CASCADE	5 BOILER CASCADE	6 BOILER CASCADE
222960	Standard height insulation Starter kit	1	1	1	1	1
222961	Standard height insulation Continuation kit	1	2	2	3	4
222962	Standard height insulation joined header kit	-	-	1	1	1

INSULATION FOR LOW HEIGHT HEADER KITS

UIN	DESCRIPTION	1 BOILER CASCADE	2 BOILER CASCADE	3 BOILER CASCADE	4 BOILER CASCADE
222894	Standard height insulation Starter kit DN50	1	-	-	-
223035	Standard height insulation Starter kit DN65	-	1	-	-
223038	Standard height insulation starter kit DN80 and DN100	-	-	1	1
223036	Standard height insulation Continuation kit DN65	-	1	-	-
223039	Standard height insulation Continuation kit DN80 and DN100	-	-	2	2
223040	Standard height insulation joined header kit DN80 and DN100	-	-	-	1

INSULATION FOR LOW LOSS HEADER AND MAGNETIC LOW LOSS HEADER

UIN	DESCRIPTION
222963	DN50 (M)LLH insulation kit
222964	DN65 (M)LLH insulation kit
222965	DN80/DN100 (M)LLH insulation kit


INSULATION FOR PUMPS

UIN	DESCRIPTION	1 BOILER CASCADE	2 BOILER CASCADE	3 BOILER CASCADE	4 BOILER CASCADE	5 BOILER CASCADE	6 BOILER CASCADE
222894	Grundfos UPML (M)LLH insulation kit	1	2	3	4	5	6

SYSTEM LAYOUT


TYPICAL SYSTEM BOILER LAYOUT

INDEPENDENT HEAT FRAME and HEADER KIT C/W Plate heat exchanger

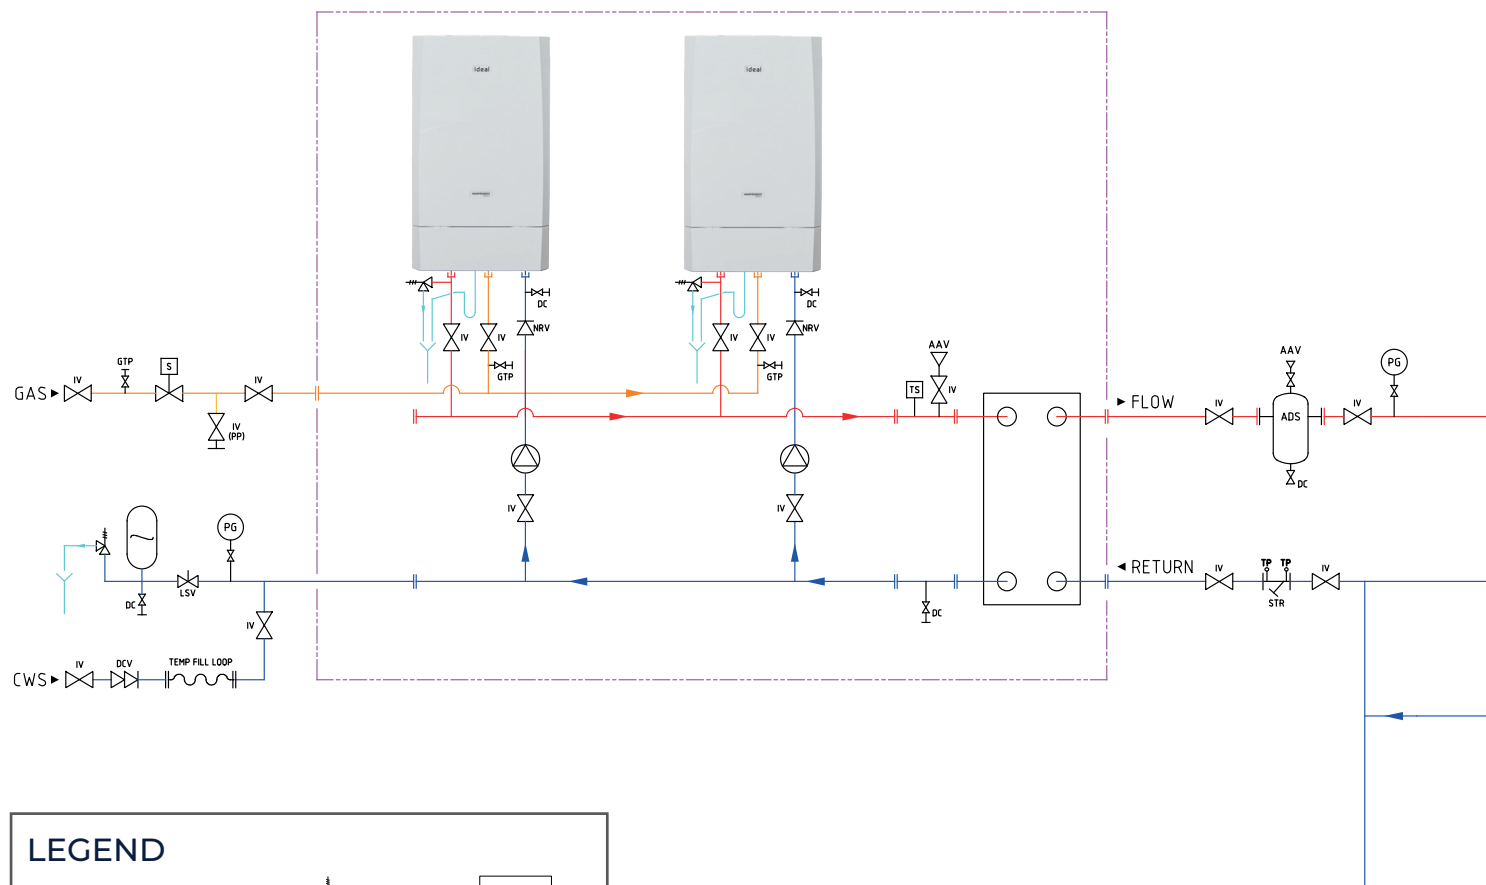

LEGEND

	ISOLATION VALVE		PURGE VALVE		PRESS/TEMP RELIEF VALVE		PLATE HEAT EXCHANGER
	LOCKSHIELD VALVE		TEST POINT		AAV		AIR/DIRT SEPARATOR
	COMMISSIONING VALVE		GAS TEST POINT		ADS		DOSING POT
	STRAINER C/W TEST POINTS		SAFETY VALVE		IRPZ VALVE		GAS BOOSTER
	NON-RETURN VALVE		TUNDISH		SINGLE HEAD PUMP		TWIN HEAD PUMP
	DOUBLE CHECK VALVE		TEMPERATURE GAUGE		EXPANSION VESSEL		LOW LOSS HEADER
	SOLENOID VALVE		PRESSURE GAUGE		TEMP FILL LOOP		PRESSURISATION UNIT
	MOTORISED VALVE		TEMPERATURE SENSOR		CONTROL STAT		WATER METER
	PRESSURE REDUCING VALVE		HI-LIMIT STAT		TEMP FILL LOOP		
	AUTO AIR VENT		TEMP FILL LOOP				
	DRAIN COCK						

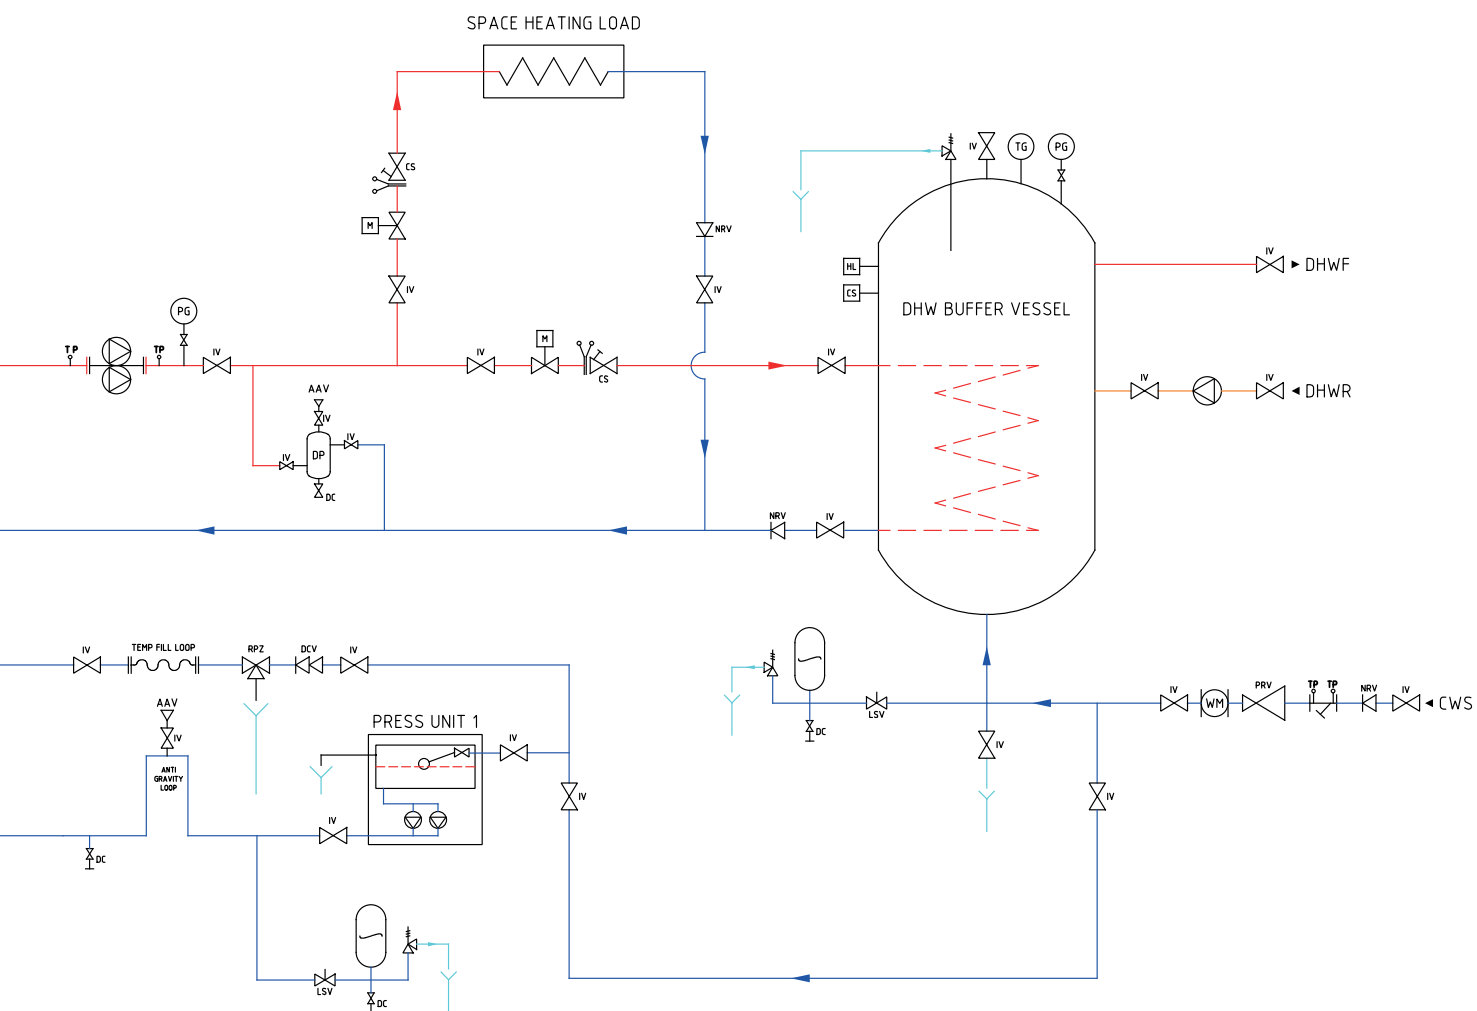

Note: this schematic is an illustration of a hydraulic arrangement for discussion and reference use only.


The schematic may not accurately describe the actual arrangement required in order for the system to operate correctly and additional components may be required. Under no circumstances should this be used as basis for procurement, production or installation.

CONCENTRIC FLUE OPTIONS (C TYPE)

HORIZONTAL WALL FLUE KIT

EVOMAX 2 HORIZONTAL CONCENTRIC FLUE APPLICATION ~ MAXIMUM LENGTHS AND PRESSURE DIFFERENTIALS

Model	40/40P	60/60P	80/80P	100	120	150
Max flue length (m)	30	17.5	10	10	9	6
Flue size	80/125			100/150		
Wall flue kit No	220919			220921		




CONTENTS

- 90° elbow
- Terminal
- Locking collars (x2)
- Wall plates (x2)

EVOMAX 2 60 AND 80 HORIZONTAL CONCENTRIC FLUES OF LONGER LENGTHS (LARGER FLUE DIAMETER)

Model	60/60P	80/80P
Max flue length (m)	28	18
Flue size	100/150	
Wall flue kit No	220920	

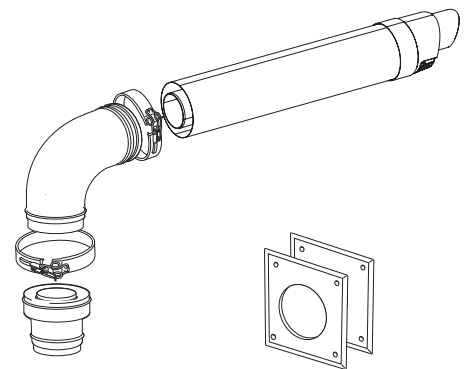

CONTENTS


- Increaser
- 90° elbow
- Terminal
- Locking collars (x2)
- Wall plates (x2)

To comply with CE certification, Evomax boilers must be fitted with Ideal concentric flues (when using concentric flue type).

VERTICAL ROOF FLUE KIT

EVOMAX 2 VERTICAL CONCENTRIC FLUE APPLICATION ~ MAXIMUM LENGTHS AND PRESSURE DIFFERENTIALS

Model	40/40P	60/60P	80/80P	100	120	150
Max flue length (m)	30	17.5	10	10	9	6
Flue size	80/125			100/150		
Wall flue kit No	220915			220918		

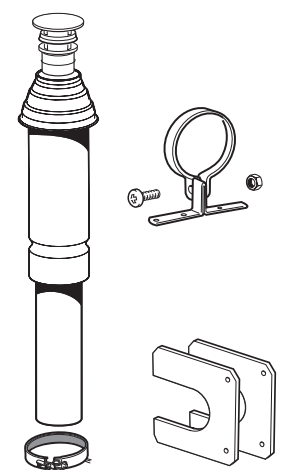


CONTENTS

- Terminal
- Locking collar
- Finishing plates (x2)
- Bracket

EVOMAX 2 60 AND 80 VERTICAL CONCENTRIC FLUES OF LONGER LENGTH		
Model	60/60P	80/80P
Max flue length (m)	28	18
Flue size	100/150	
Wall flue kit No	220916	

CONTENTS

- Increaser
- Locking collars (x2)
- Terminal
- Finishing plates (x2)
- Bracket

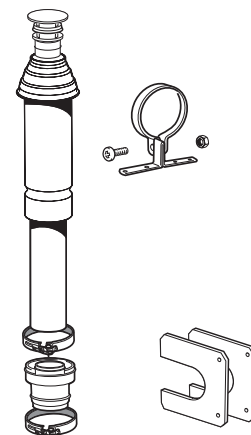

OPEN FLUE OPTIONS (B TYPE)

EVOMAX 2 VERTICAL CONCENTRIC FLUE APPLICATION ~ MAXIMUM LENGTHS AND PRESSURE DIFFERENTIALS						
Model	40/40P	60/60P	80/80P	100	120	150
Max flue length (m)	70	25	15.3	20	49	32
Max flue press diff (Pa)	227	146	312	220	473	332
Flue size	80/125			100/150		
Wall flue kit No	221216 + 158771 + 158769			221218 + 158772 + 158770		

CONTENTS

- | | | |
|---------------------|-----------------|-------------------------|
| 221216 / 221218 | 158769 / 158770 | 158771 / 158772 |
| • Air inlet grille* | • Terminal | • Extension tube (x2)** |



* The air inlet grille must be fitted to all installations.

** At least 1 off extension tube MUST be used in the installation. This may be suitably cut to length if required.

FLUE KIT ACCESSORIES




FLUE KITS - CONCENTRIC	UIN
Vertical roof flue kit 80/125 (30 - 80kW)	220915
Vertical roof flue kit 100/150 (60 and 80kW)	220916
Vertical roof flue kit 100/150 (100 - 150kW)	220918
Horizontal wall flue kit 80/125 (30 - 80kW)	220919
Horizontal wall flue kit 100/150 (60 and 80kW)	220920
Horizontal wall flue kit 100/150 (100 and 120kW)	220921
Extension kit 80/125	213261
Extension kit 100/150	213262
Pitched weather collar 80/125	152609
Pitched weather collar 100/150	152610
Flat weather collar 80/125	152611
Flat weather collar 100/150	152612
90° elbow 80/125 (single)	213259
90° elbow 100/150 (single)	213263
90° elbow 80/125 (extended)	222004
90° elbow 100/150 (extended)	222005
45° elbow 80/125 (single)	213260
45° elbow 100/150 (single)	213258
Wall bracket 125mm	202242
Wall bracket 150mm	202243
Expander 80/125 - 100/150	222133

FLUE KITS - CONCENTRIC

220915	220916	220918	220919	213261	213262	152609
			220920			152610
			220921			152611
152612	213259	213263	213260	213258	202242	202243
						222133

FLUE KITS - OPEN FLUE	UIN
Open flue kit 80	221216
Open flue kit 100	221218
Vertical flue terminal 80	158769
Vertical flue terminal 100	158770
Extension pipes 80 (pair)	158771
Extension pipes 100 (pair)	158772
90° elbow 80 (single)	158773
90° elbow 100 (single)	158774
45° elbow 80 (pair)	158775
45° elbow 100 (pair)	158776
Pitched weather collar 80 and 100	158779
Flat weather collar 80 and 100	152259
Increaser 80-100	152404

FLUE KITS - OPEN FLUE

221216 	158769 	158770 	158771 	158772 	158773 	158774 	158775 
221218 					158776 	158777 	152259 
					152404 		

FLUE RESISTANCES

Flue Systems

For concentric flue systems with elbows fitted, use the table to correct the maximum flue extension capability. Alternatively use the table to design the flue system, deducting the individual resistance of components from the maximum pressure drop allowed in the flue for that boiler. The maximum pressure drop allowed in the flue is given below.

PERMISSIBLE FLUE LENGTH

The maximum permissible flue lengths for each model are shown in table 1 below, these lengths are inclusive of the terminal resistance. The value shown is the maximum available length for extension. The equivalent length of elbows is shown in table 2.

TABLE 1

MAX PERMISSIBLE EQUIVALENT FLUE LENGTH (INC TERMINAL RESISTANCE) METRES				
	CONCENTRIC		OPEN FLUE	
Flue size	80/125	100/150	80	100
Model				
40/40P	30	-	70	-
60/60P	17.5	28	25	-
80/80P	10	18	15.3	-
100	-	10	-	20
120	-	9	-	49
150	-	6	-	32

TABLE 2

EQUIVALENT LENGTH OF ELBOWS (METRES)				
	CONCENTRIC		OPEN FLUE	
Size	80/125	100/150	80	100
45°	0.85	1.25	0.45	0.60
90°	1.6	1.9	1.0	1.0

EXAMPLES OF FLUE LENGTH CALCULATION							
MODEL	FLUE TYPE	MAX PERMISSIBLE EQUIVALENT LENGTH (TABLE 1)	ELBOWS				MAX PERMISSIBLE STRAIGHT LENGTH
			TYPE	EQUIVALENT LENGTH (TABLE 2)	NO	TOTAL EQUIVALENT LENGTH	
60	80/125	17.5	90	1.6	2	3.2	14.3
60	100/150	28	90	1.9	2	3.8	24.2
80	80/125	10	90	1.6	3	4.8	5.2
120	100/150	9	90	1.9	4	7.6	1.4

FOR OWN BUILT OPEN FLUE USE THIS:


MAXIMUM ALLOWABLE PRESSURE DIFF AND FLUE LENGTH FLUES INCLUDING TERMINAL		
MODEL	FLUE SIZE	PRESSURE DIFF (Pa)
40/40P	80/125	227
60/60P	80/125	150
80/80P	80/125	312
100	100/150	220
120	100/150	473
150	100/150	332


EXAMPLES OF CALCULATING FLUE RESISTANCES/LENGTHS

EXAMPLE 1 (CONCENTRIC)

HORIZONTAL FLUE FOR INDEPENDENT HEAT 40	
	Resistance (m)
Flue size	80/125
Max permissible flue run	30
2 x 90° elbow	2 x 1.6 = 3.2
Total flue length available	30 - 3.2 = 26.8

Therefore this installation is acceptable as only a 2m run.

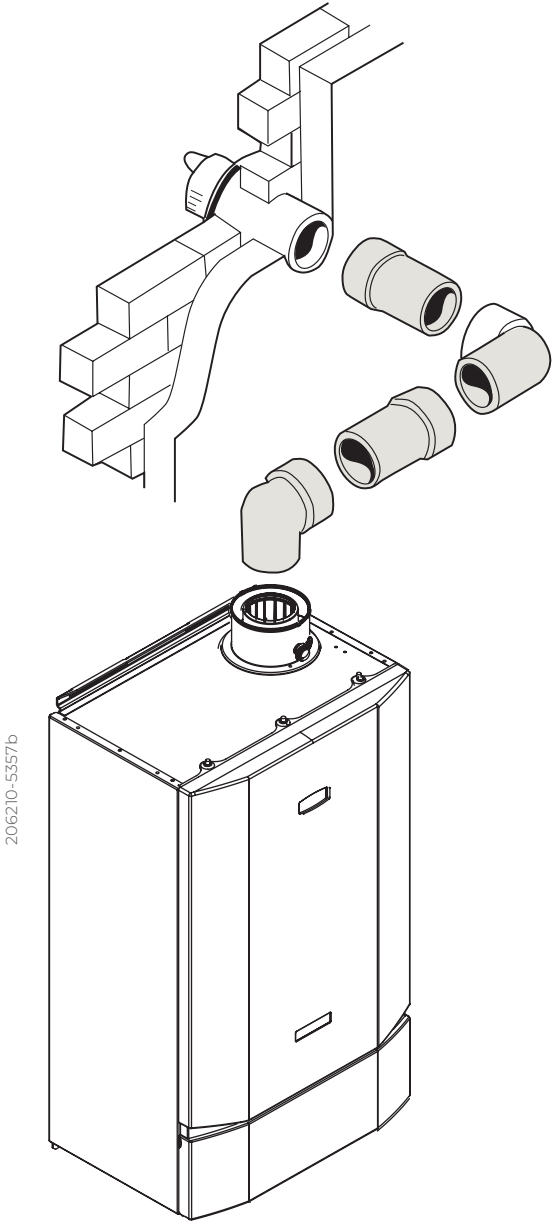


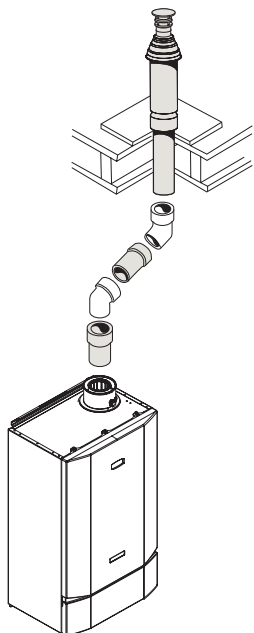


EXAMPLE 2 (CONCENTRIC)

VERTICAL FLUE FOR INDEPENDENT HEAT 80	
	Resistance (m)
Flue size	80/125
Max permissible flue run	10
2 x 45°	$2 \times 0.85 = 1.7$
Total flue resistance	$10 - 1.7 = 8.3$

EXAMPLE 3 (OPEN FLUE)

OPEN FLUE FOR INDEPENDENT HEAT 40	
	Resistance (m)
Flue size	80
Max permissible flue run	70
2 x 45° elbow	$2 \times 0.45 = 0.9$
Total flue resistance	$70 - 0.9 = 69.1$

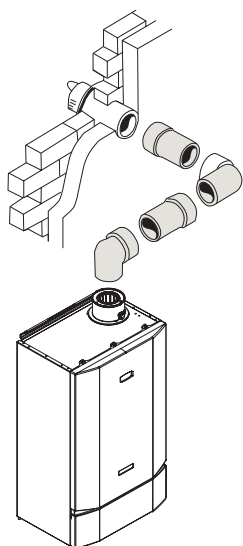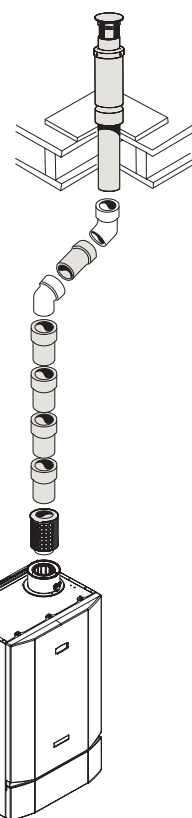


EXAMPLE 4 (CONCENTRIC)

HORIZONTAL FLUE FOR INDEPENDENT HEAT 120	
	Resistance (m)
Flue size	100/150
Max permissible flue run	9
2 x 90° elbow	$2 \times 1.9 = 3.8$
Total flue resistance	$9 - 3.8 = 5.2$

MULTILINE CASCADE

Available for installations up to 600kW as both a starter kit and extension pack the multiline system enables Independent Heat boilers installed as open flue to be connected via a common flue header. This creates a single flue connection point for a flue specialist to design to knowing that the boiler installation is efficient and safe.

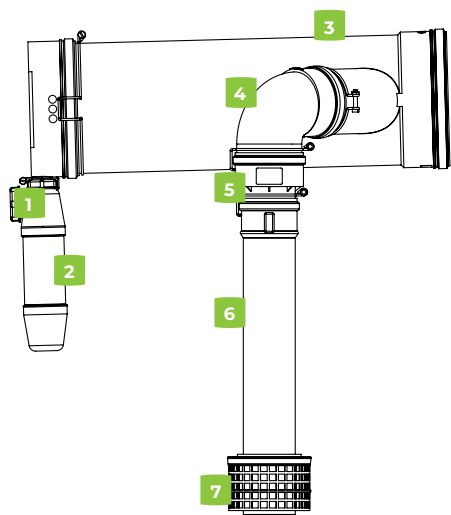

- Simple system ordering with a starter kit and extension kits
- Starter kit includes, appliance connection, non-return flue damper, condensate tee and trap and all clips to secure the flue
- Extension pack includes appliance connection, non-return flue damper, and all clips to secure the flue
- Available for both 80/125 and 100/150 flue adaptor applications
- For installations up to 600kW
- Type B23 flue
- Designed specifically to work efficiently with Independent Heat boilers with commissioning simply completed by selecting multiline flue from the installer set up menu
- The perfect addition for installations using either the standard height or low frame and header kits

	PRODUCTS	STARTER KIT	EXTENSION KIT
1	End cap	✓	
2	Siphon / condensate trap	✓	
3	Collector pipe (200 dia)	✓	✓
4	Elbow (90 x 100)	✓	✓
5	Expander (80/125 flue adaptor kits only)	✓	✓
6	Flue extension tube (80 or 100)	✓	✓
7	Air intake grill	✓	✓


The Cascade flue system is supplied in two kits. A starter kit and an extension kit. Wire retaining clips are also provided to prevent movement of the tube connections due to expansion and contraction. These must be fitted to the ductwork to ensure safe operation of the system.

OPERATION

SYSTEM CONFIGURATIONS

OPTION	GAS TYPE	INDEPENDENT HEAT MODELS	MAX NUMBER OF BOILERS	MAX SYSTEM CAPACITY
1	Natural gas	Combinations of 100, 120, 150	6	600kW
2		Combinations that include a 40, 60 or 80	6	400kW
3	Propane	Combinations of 40P, 60P, 80P	6	400kW

Flue height = 570mm from the top of the first boiler in the system. Increase the height 29mm for each adjacent boiler.

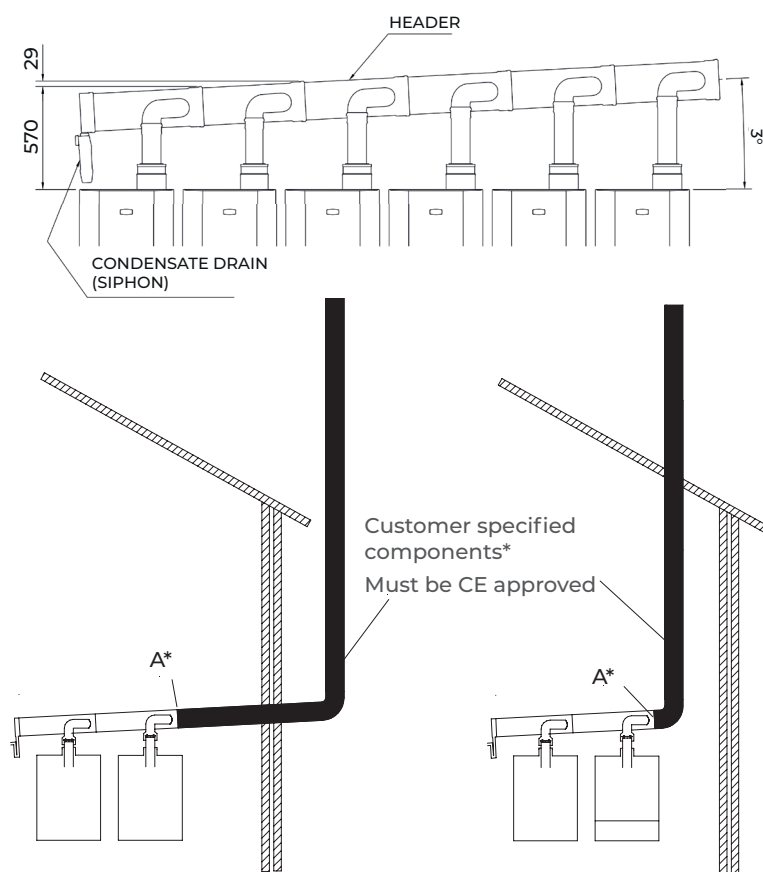

UIN	DESCRIPTION
220925	Multiline starter kit 80/125
220926	Multiline extension kit 80/125
220927	Multiline starter kit 100/150
220928	Multiline extension 100/150

*Multiline flue supplied to point A. Customers are to fabricate / supply B type flue system to termination point within flue resistance parameters.


At the maximum system capacity the static pressure generated against the flue resistance at position [A] must not exceed the value Pmax quoted in the table below.

EVOMAX MODEL OUTPUT		CASCADE SYSTEM LIMITS		COMBUSTION PRODUCTS DATA		
Model		Maximum system capacity	Maximum permissible header pressure 'a' (static)	Max rate CO ₂	Min rate CO ₂	Temperature max
Max	Min	Hmax	Pmax	±0.5	±0.5	
kW	kW	kW	Pa	%	%	C
40	10	400	40	9.7	9.0	72
60	15					
80	20					
100	25	600	80	9.7	9.0	72
120	30					
150	37.5					
40P	10	400	40	11.4	10.6	
60P	15					
80P	20					

PLUME KIT

Available for Independent Heat boilers up to 150kW the Plume Kit can be used to relocate the flue terminal up to 10m.

- Suitable for all Independent Heat up to 150kW
- Available for both 80/125 and 100/150 flue applications
- Plume kit offers terminal relocation up to 10m
- Includes standard appliance connector, horizontal flue kit, special rain collar, external plume kit 1m and terminal
- Offers neat solutions for awkward flue installations where the terminal requires relocation

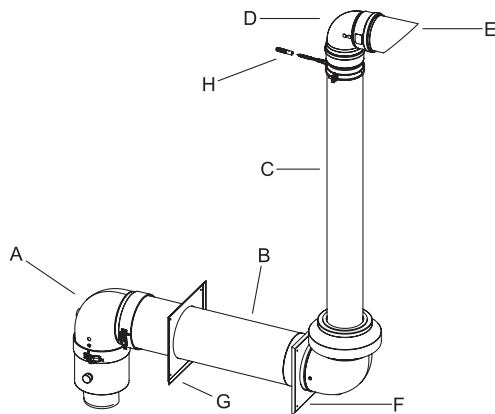


PRODUCTS	
A	Turret elbow
B	Flue terminal with rain cowl and air terminal assembly
C	1 Meter extension tube
D	90 degree elbow
E	Flue terminal end
F	External wall plate
G	Internal wall plate
H	Wall bracket

OPERATION

PLUME KIT - PACKAGED OPTIONS

UIN	DESCRIPTION	DRAWING IDENTIFIER	COMPATIBLE WITH INDEPENDENT HEAT 40, 40P, 60, 60P, 80, 80P	COMPATIBLE WITH INDEPENDENT HEAT 100, 120, 150
213274	Plume kit 1m extension 80/125	A	☒	
213272	Plume kit 90 deg elbow 80/125	B	☒	
213273	Plume kit 45 deg elbows (pair) 80/125	C	☒	
213277	Plume kit 1m extension 100/150	A	*	☒
213275	Plume kit 90 deg elbow 100/150	B	*	☒
213276	Plume kit 45 deg elbows (pair) 100/150	C	*	☒

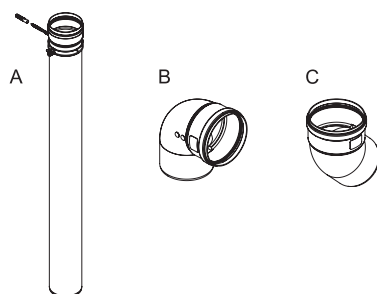


*Note: The 100/150mm plume kit system can also be used on Independent Heat 80, 80P, 60 and 60P model variants if internal concentric wall horizontal flue adaptor is used (Part No. 158660). See Independent Heat installation manual for details.

PLUME KIT - 80/125

UIN	DESCRIPTION
220922	Plume kit 80/125
213274	Plume kit 1m extension 80/125
213272	Plume kit 90° elbow 80/125
213273	Plume Kit 45° elbow 80/125 (Pair)

PLUME KIT - 100/150

UIN	DESCRIPTION
220923	Plume kit 100/150
213277	Plume kit 1m extension 100/150
213275	Plume kit 90° elbow 100/150
213276	Plume kit 45° elbow 100/150 (Pair)

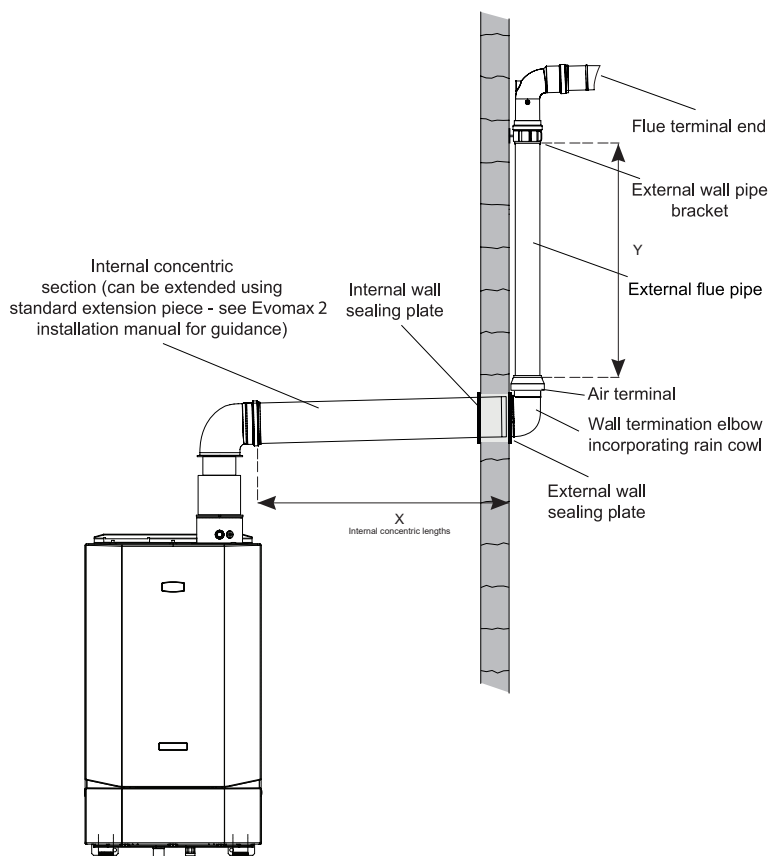

80 / 125 DIA FLUE ~ MAXIMUM PERMISSIBLE FLUE LENGTHS (m)				
EVOMAX 2 MODEL	30/30P	40/40P	60/60P	80/80P
Y	X			
0.5	30.2	27.2	14.7	7.2
1.0	29.9	26.9	14.4	6.9
1.5	29.7	26.7	14.2	6.7
2.0	29.5	26.5	14.0	6.5
2.5	29.2	26.2	13.7	6.2
3.0	29.0	26.0	13.5	6.0
3.5	28.8	25.8	13.3	5.8
4.0	28.6	25.6	13.1	5.6
5.0	28.1	25.1	12.6	5.1
6.0	27.7	24.7	12.2	4.7
7.0	27.2	24.2	11.7	4.2
8.0	26.8	23.8	11.3	3.8
9.0	26.3	23.3	10.8	3.3
10.0	25.9	22.9	10.4	2.9

100 / 150 DIA FLUE ~ MAXIMUM PERMISSIBLE FLUE LENGTHS (m)					
EVOMAX 2 MODEL	60/60P	80/80P	100/100P	120/120P	150
Y	X				
0.5	25.0	15.0	7.0	6.0	3.0
1.0	24.8	14.8	6.8	5.8	2.8
1.5	24.7	14.7	6.7	5.7	2.7
2.0	24.6	14.6	6.6	5.6	2.6
2.5	24.4	14.4	6.4	5.4	2.4
3.0	24.3	14.3	6.3	5.3	2.3
3.5	24.1	14.1	6.1	5.1	2.1
4.0	24.0	14.0	6.0	5.0	2.0
5.0	23.7	13.7	5.7	4.7	1.7
6.0	23.5	13.5	5.5	4.5	1.5
7.0	23.2	13.2	5.2	4.2	1.2
8.0	22.9	12.9	4.9	3.9	0.9
9.0	22.6	12.6	4.6	3.6	0.6
10.0	22.4	12.4	4.4	3.4	0.4

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, providing a template for handwriting practice. There are no margins, text, or other markings on the paper.



ASK YOUR
LOCAL BUSINESS
DEVELOPMENT
MANAGER
ABOUT THE
INDEPENDENT HEAT

Idealcommercialheating.com/products/independent-heat

[illegible]

commercial@idealheating.com

03330 040 393

ASK YOUR
LOCAL BUSINESS
DEVELOPMENT
MANAGER
ABOUT THE
INDEPENDENT HEAT

For full details visit:

Idealcommercialheating.com/products/independent-heat



Sales:

03330 040 393

Calls cost no more than calls to geographic numbers (01 or 02) and will be included in any inclusive minutes you have with your telephone service provider.

commercial@idealheating.com

Technical Help:

01482 498376

PO Box 103, National Avenue,
Kingston upon Hull, East Yorkshire, HU5 4JN
group.commercial@groupe-atlantic.co.uk

APPROVAL

These appliances are certified to G.A.D. 90/396 and B.E.D. 92/42 Safety and Performance Directives for gas boilers. Ideal Commercial Boilers pursues a policy of continuous improvement in design and performance of its products and reserves the right to vary specification without notice. Statutory rights of the consumer are not affected.

PLEASE NOTE:

The information in this brochure was correct at the time of going to print. Ideal Commercial Boilers reserve the right to make any modifications to product specifications or any other details, without prior notification. For further clarification, please enquire in writing to the head office address.

